

WATERPOLO

OMEGA CALYPSO Waterpolo Controller

The controller presents all important information on a large LCD display (240 x 128 pixels), allowing simple, user-friendly operation.

Controller and scoreboard are linked through a RS485 cable.

The cable enters each peripheral device and connects straight through, allowing the whole hall to be wired with a single cable.


Optional Bluetooth modules are available in order to reduce cable clutter even more.




TOP FEATURES

- User friendly LCD matrix 240 x 128 pixels
- Self-explaining icon to navigate
- Software upgrades available on our website

OPTIONS

3403.900.BT	OMEGA CALYPSO WP Controller with  Bluetooth
3400.788	External Start / Stop / Reset Pushbutton

SPECIFICATIONS

CALYPSO Controller :	3403.900
Dimensions :	285 x 205 x 90 mm
Weight :	1.2 Kg
Using temperature :	0 to +45 °C
Storage temperature :	-10 to +60 °C
Connections :	RS422
Certifications:	CE and  RoHS compliant
Power supply:	9 - 18 VDC
External Power supply:	110 - 240 VAC / 12 VDC
Power consumption:	10 VA
Protection:	IP 54



COYOTE HORN




CALYPSO SHOT CLOCKS




SATURN 962



MONTREAL SHOT CLOCKS

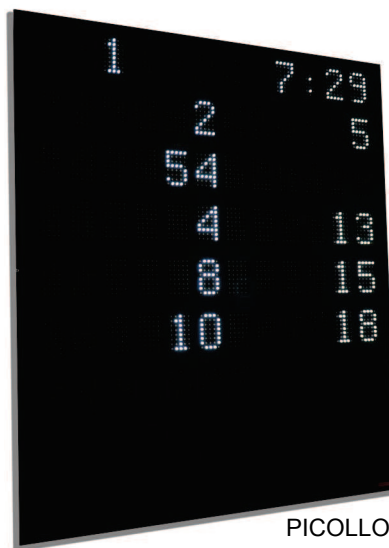

PICOLLO White

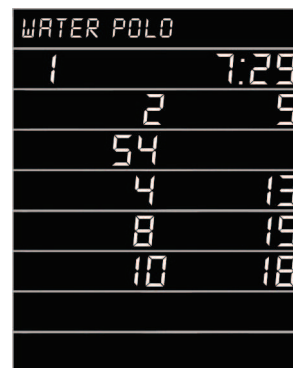

CALYPSO LINES

All the information contained in this document can be modified without warning. Swiss Timing LTD cannot be made responsible for any errors contained in this document or for any damage secondary or consequent (including the loss of profits) arising from the supplying, performance or use of this product, whether it be on the base of a guarantee, a contract or any other legal ground.

CALYPSO WP CONTROLLER 3403_1305

SWISS TIMING LTD

A COMPANY OF THE  SWATCH GROUP

MEGATEK

S.A.R.L. MEGATEK
Rue Jean-Pierre Timbaud
94290 VILLENEUVE-LE-ROI
Tél. : 01.45.97.16.00 Fax : 01.49.61.54.37
megatek@megatek.fr www.megatek.fr